






# GINGER P

*A pending Lighting fixture spotlight for outdoor or indoor.*



|  |            |   |           |             |   |   |   |   |
|--|------------|---|-----------|-------------|---|---|---|---|
|  | <b>CRI</b> |  | <b>lm</b> | <b>lm/w</b> |  |  |  |  |
| IP 67  | Min 90     | 3W  | 240 lm    | 131 lm/w    | 4° - 50° /<br>Ov  | 2200 -<br>5700K   | R / G / B   | RAL /<br>Anodize  |

**GINGER** is a line of spotlights affording a small and slick design and leading-edge technology. The series of spots includes both recessed and freestanding fixtures. **GINGER 400** is a new line of spotlights with higher light output of 460lm thanks to Luxeon 5050 Led.

Although **GINGER** is small in size (only 74mm), it affords a mighty light output of 240lm, thanks to the new Luxeon TX LED. Furthermore, GINGER's dark-light design ensures a pure light without glare.

**GINGER** has a smart design, incorporating a unique cooling method, and a concealed cable PG, to provide a slim cutout where its anodized color lends the final touch of an artist.

**GINGER P** is a spotlight for outdoor or indoor pending from the ceiling. This line is ideal for illuminating facades and niches, spas and pool areas, landscape lighting and scenery, counters and shelves, indoor and outdoor use, at home and/or in the office.



**OUTPUT**

|                |   |
|----------------|---|
| LED System     | Luxeon TX   |
| Intensity      | 240 lm @ full power CRI 90 3000K                                      |
| Channel Range  | 1 Channel   |
| Color Range    | 2200 / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K / COLORS |
| Optical System | 11° / 15° / 28° / 44° / Oval 12 * 52°                                 |

**ENVIRONMENTAL**



|                 |                             |
|-----------------|-----------------------------|
| Control         | External LED driver         |
| Input Voltage   | 3V                          |
| Consumption     | 2.1W @ 700mA, 3.15W @1050mA |
| Max LED's       | 1 LED                       |
| Efficiency LM/W | 121lm/w                     |
| Connection      | 22AWG 2C Concealed cable PG |

**PHYSICAL**

|               |                            |
|---------------|----------------------------|
| IP Rating     | IP 67                      |
| Working Temp. | -18°C ~ 40°C / 0°F ~ 104°F |
| Storage Temp. | -18°C ~ 60°C / 0°F ~ 140°F |

**PHYSICAL**

|         |                  |
|---------|------------------|
| Size    | H74mm * Ø36mm    |
| Housing | Aluminum Anodize |

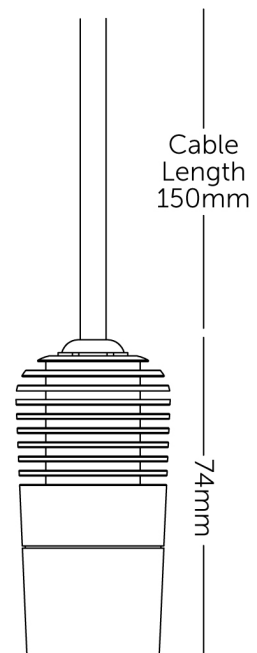

Hobeycomb

**TECHNICAL SPECIFICATION**