The image shows the interior of the Holon Sports Hall. A large, curved, blue-painted concrete ceiling dominates the upper half of the frame. It is illuminated from within, creating a vibrant blue glow. Below the ceiling, several thick, cylindrical concrete pillars support the structure. The floor is a light-colored, polished surface. In the background, there are large glass windows and doors, some with green exit signs. The overall atmosphere is modern and architectural.


# ***SPICE-TUBE***

*An Outdoor anti vandal light fixture with Mid Power LEDs.*

**SPICE TUBE** introduces an innovative approach to lighting design and energy efficiency, with a variety of high quality optics to choose from, and the flexibility to choose the desired length and light output of each run.

**SPICE TUBE** is designed for external applications. It is ideal for industrial workspace factories and spaces. The enclosure is well suited for conditions of dust and water thanks to its excellent sealing, IP68 rated and can be submerged to a depth of 2 meters. With 2 mm polycarbonate housing this luminaire has the highest degree of impact protection.

**SPICE TUBE** comes in 3 different lengths and wide range of optics to suite particular design needs. With Efficiency of 160 lm/w the **SPICE TUBE** is available in 1 or 2 channels configuration and offers a wide range of color temperatures are available. For More information about the lighting qualities of the product, please visit the SPICE section in the Website.

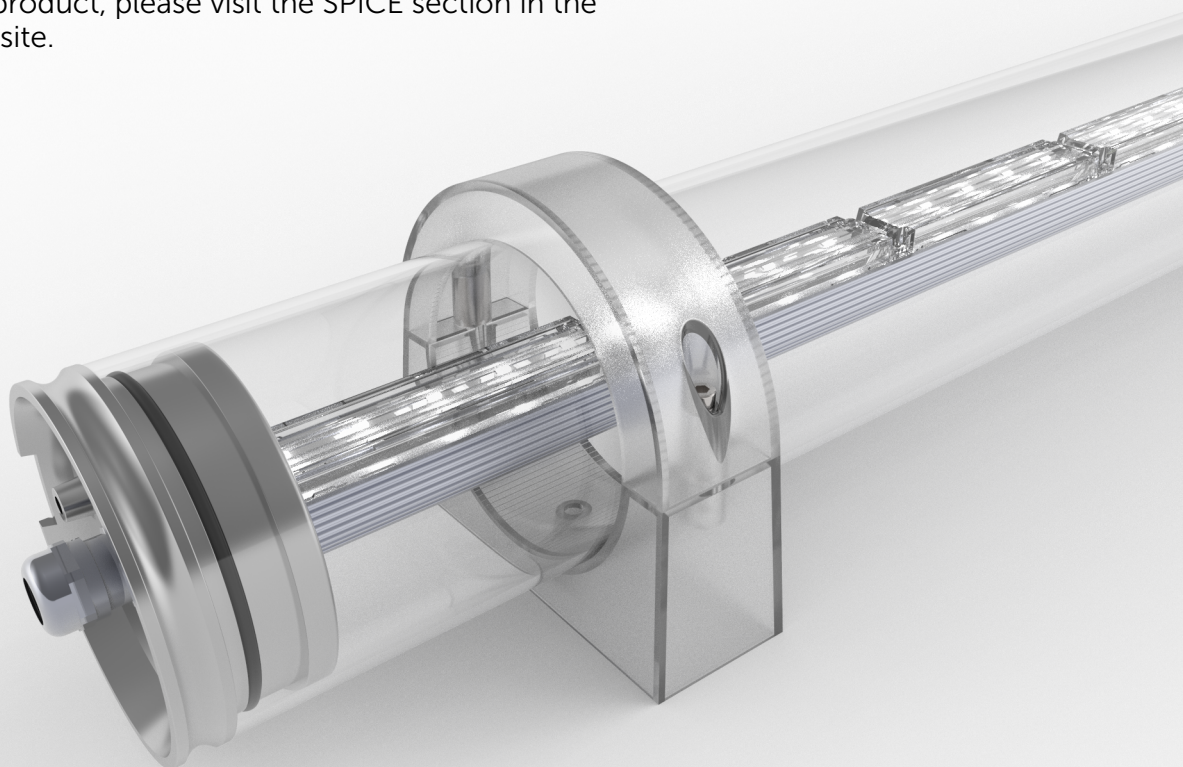

	<b>CRI</b>		<b>lm</b>	<b>lm/w</b>				
IP 68	90	43W	4300 lm	160 lm/w	Mide / Wide / OV / WG	2700 ~ 5000K	White	RAL / Anodize

## OUTPUT

LED System	Luxeon 3030 2D Mid Power LED
Intensity	3,700 lm-@ 90 CRI 900ma
Channel Range	1/2 Channel
Color Range	2700K / 3000K / 3500K / 4000K / 5000K
Optical System	Mide / Wide / OV / WG

## ELECTRICAL


Control	Integrated driver on Board
Input Voltage	42V
Consumption	43W
Max LED's	84 LEDs max / 172mm
Efficiency LM/W	160 lm/w @ 3000K
Connection	2 * 20AWG

## ENVIRONMENTAL

IP Rating	IP 68
Working Temp.	-20°C ~ 40°C / -4°F ~ 104°F
Storage Temp.	-20°C ~ 50°C / -4°F ~ 122°F

## PHYSICAL


Size	Variable Length * Ø82mm
Housing	Powder coated Aluminum

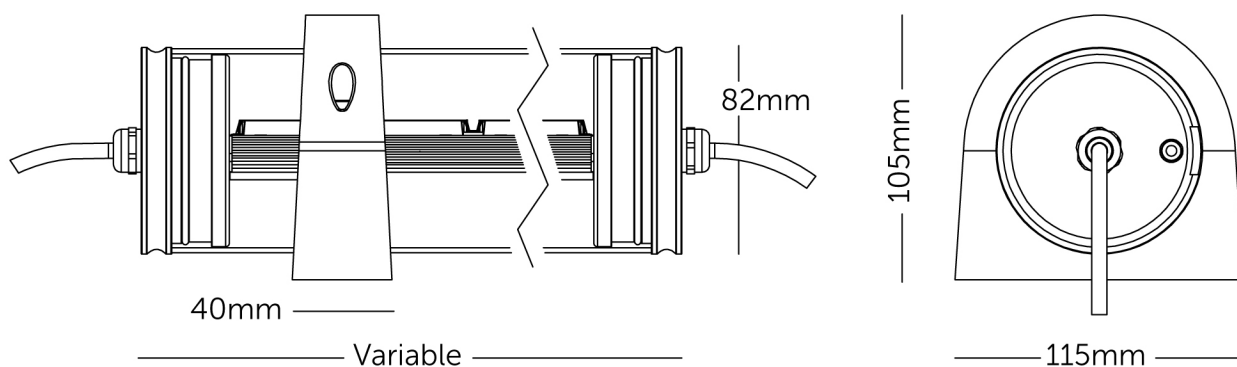

# FIXTURE LENGTH

Fixture Length	Length of Run	Number of LEDs	Watt/ Meter
579mm	572mm	28	22w
1151mm	1144mm	56	41w
1723mm	1716mm	84	43w

# ACCESSORIES

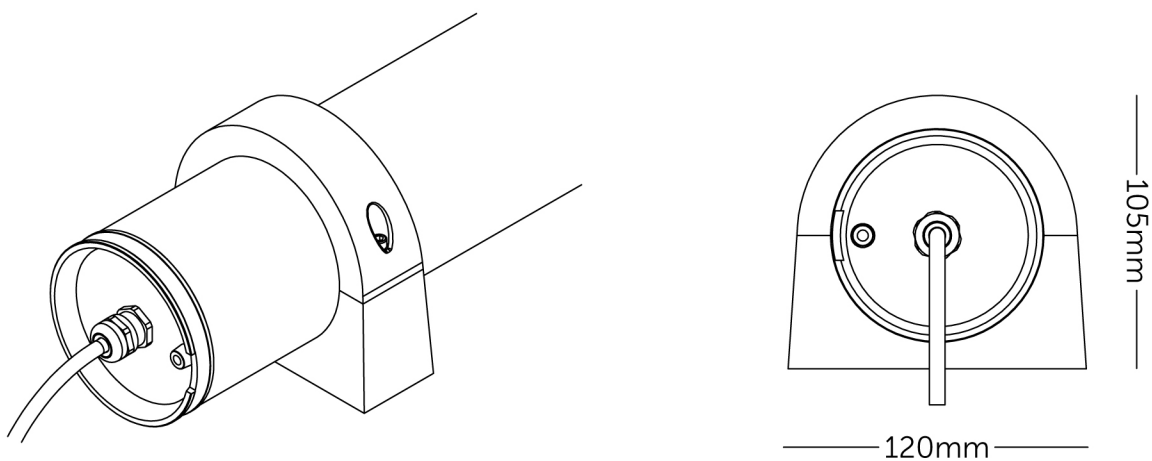

Wall Bracket

# PINOUT

